
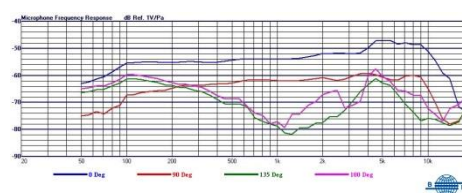


MM-590 Condenser / Dynamic Bifunctional Microphone

Features

- MM-590 is the first microphone accepts both condenser and dynamic microphone capsule modules for users to select unique tone quality up to their personal preferences. It has a switch to turn on or turn off the 48V phantom power supplied by a built-in AA battery.



Specifications

Capsule	MU-90, MU-59
Polar Pattern	Supercardioid
Installation	Interchangeable
Sensitivity	-46±3 dBV / Pa
Housing	Sterling gray die-cast zinc alloy, with an output switch.
Frequency Response	50 Hz ~ 18 kHz
Output Impedance	600Ω ± 30%
Switch	3-level switch
Dimensions	Ø 51 × 200 mm
Weight	Approx. 330 g (MU-90) Approx. 360 g (MU-59)
Note	Refer to the actual product in the event of product description discrepancy.



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. MI022/01